



Quarry tile

The experience come true



The product that best captures how tradition adapts to modern times without losing its essence. Reinventing itself with a combination of traditional techniques and materials, and adding technological tools that provide design and style, resulting in unique, sophisticated, and functional products like our Porcelagres.

As always, and totally different...



Icon Glossary

Traffic

Surface properties and uses

- PEI 2** Light residential traffic with no direct access from the exterior, such as bathrooms.
- PEI 3** Light to moderate residential traffic, such as living rooms.
- PEI 4** Residential and light commercial traffic such as residential kitchens, hallways and home entrances.
- PEI 5** High residential and commercial +



Medium



High



Commercial



Commercial+

Characteristics



Absorption



Use treated wastewater



Recovery of productive waste



Produced with low energy consumption



Produced with low water consumption



We care
for real life



Uses

Suggested installation purpose for each product.



Wall



Floor



Wall/Floor



Interior





Exterior



Interior and exterior

Variation in shade

Finish that a ceramic floor may have with regards to the color variance between one piece and another.



Number of faces

When a product has more than one version to give a more realistic feel when installed.

C1

C2

C3

C4

>C6

Variance of surface design from tile to tile

The surface condition of a piece which varies depending on the intended use and desired appearance of the finish.



Shinny



Matte




Satin



Grip



We care
for real life

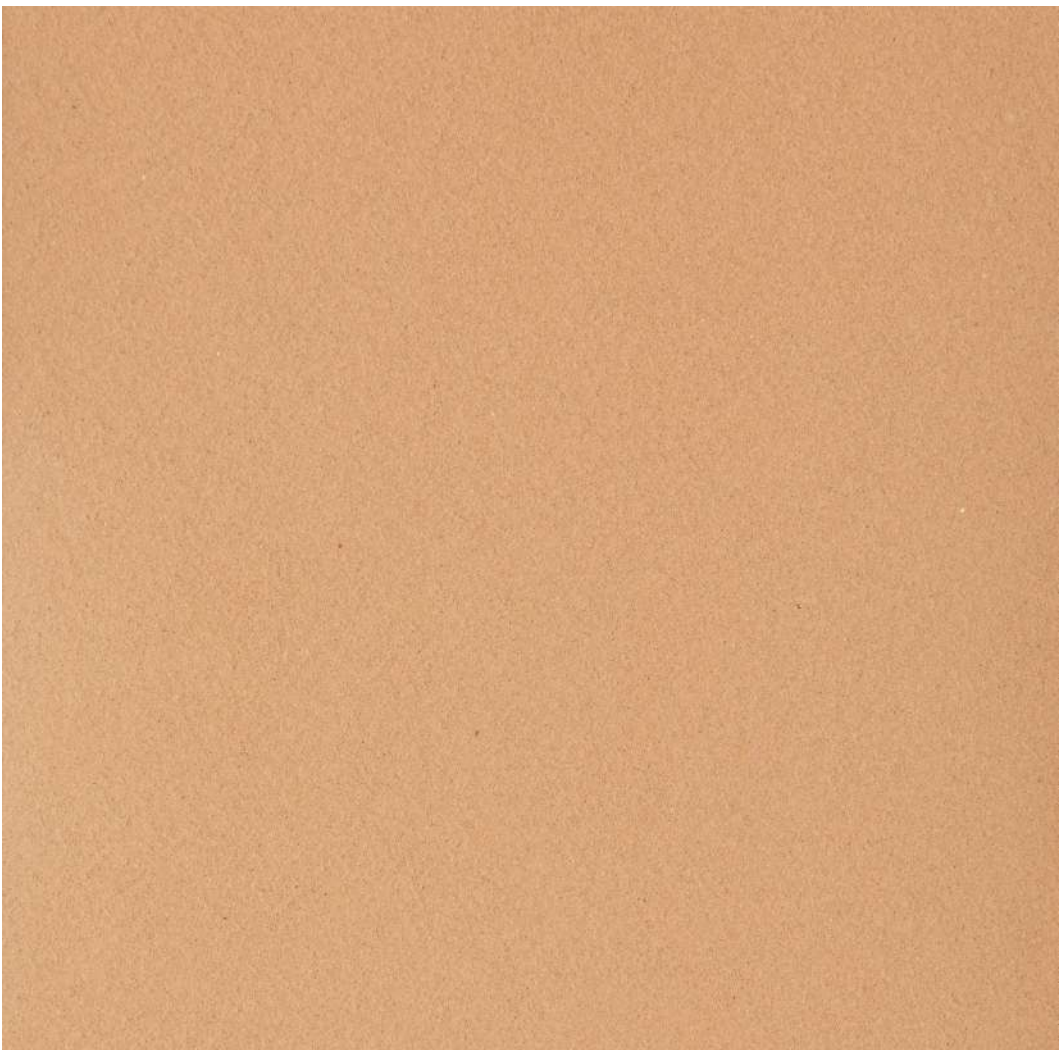

Quarry tile

Sahara

Smooth

6" x 6"

SKU: 225000385

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	



We care
for real life




Wall/Floor



Commercial



Absorption





Quarry tile

Sahara

Smooth

12"x 12"

SKU: 225026402

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	7/16 inches	



Wall/Floor




Commercial



Absorption



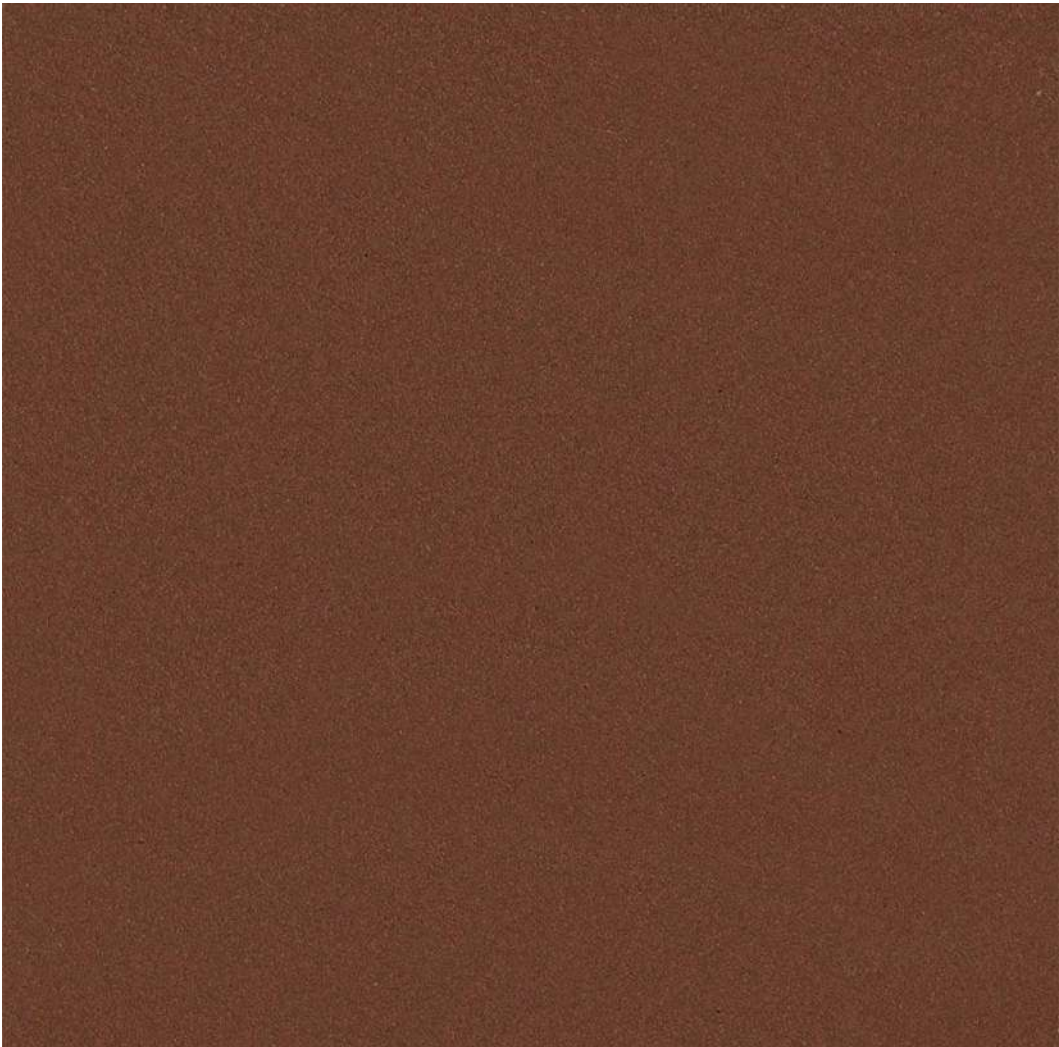

Quarry tile

Spanish Red Smooth

6" x 6"

SKU: 225000384

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	



We care
for real life




Wall/Floor



Commercial



Absorption



V2



Quarry tile

Spanish Red Smooth

12" x 12"

SKU: 225026400

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	7/16 inches	



We care
for real life



Wall/Floor




Commercial



Absorption



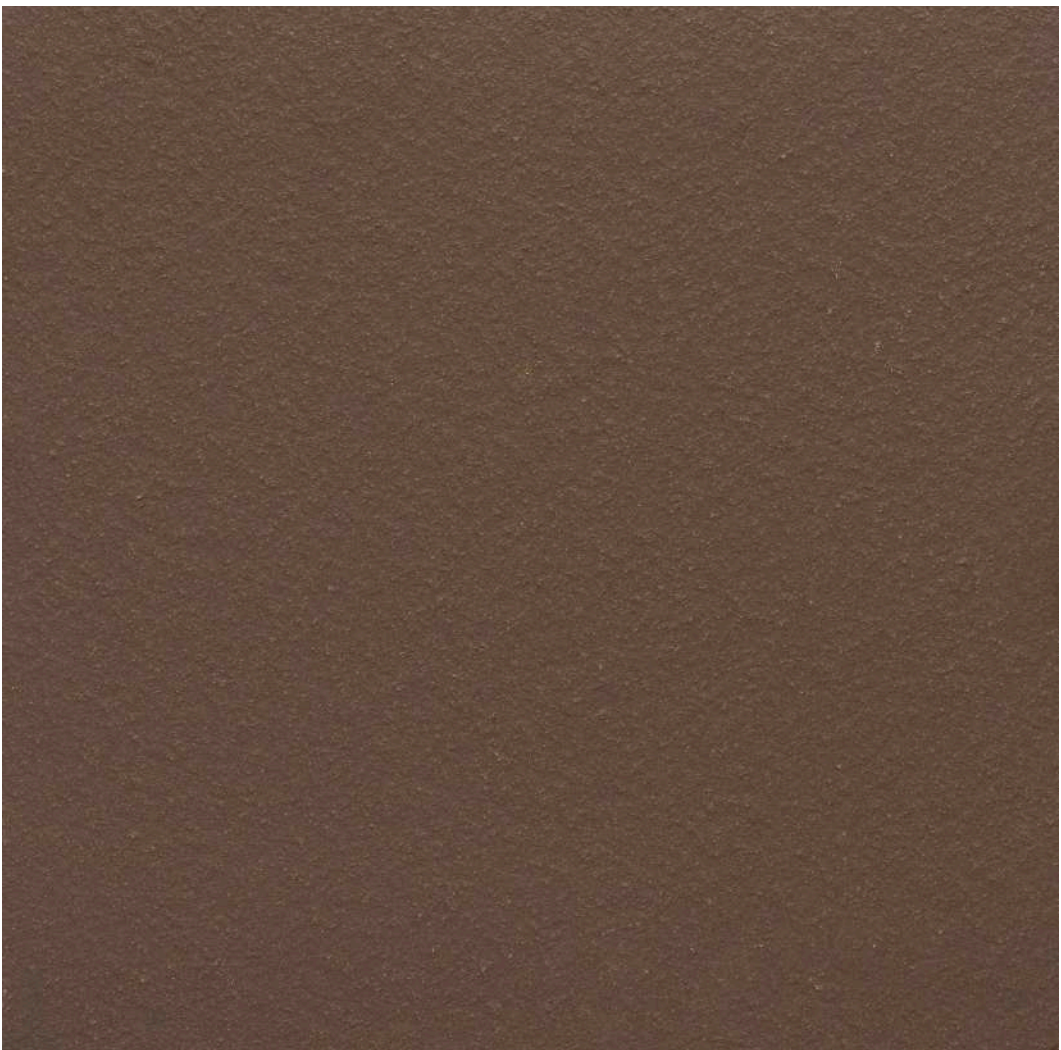

Quarry tile

Spanish Dark Gray

Smooth

6" x 6"

SKU: 225027551

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	




Wall/Floor



Commercial



Absorption



V2



Quarry tile

Spanish Dark Gray Abrasive

6" x 6"

SKU: 225027550

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	




Wall/Floor



Commercial



Absorption



V2



Quarry tile

Spanish Dark Gray

Smooth

12"x 12"

SKU: 225026413

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	7/16 inches	




Wall/Floor




Commercial



Absorption



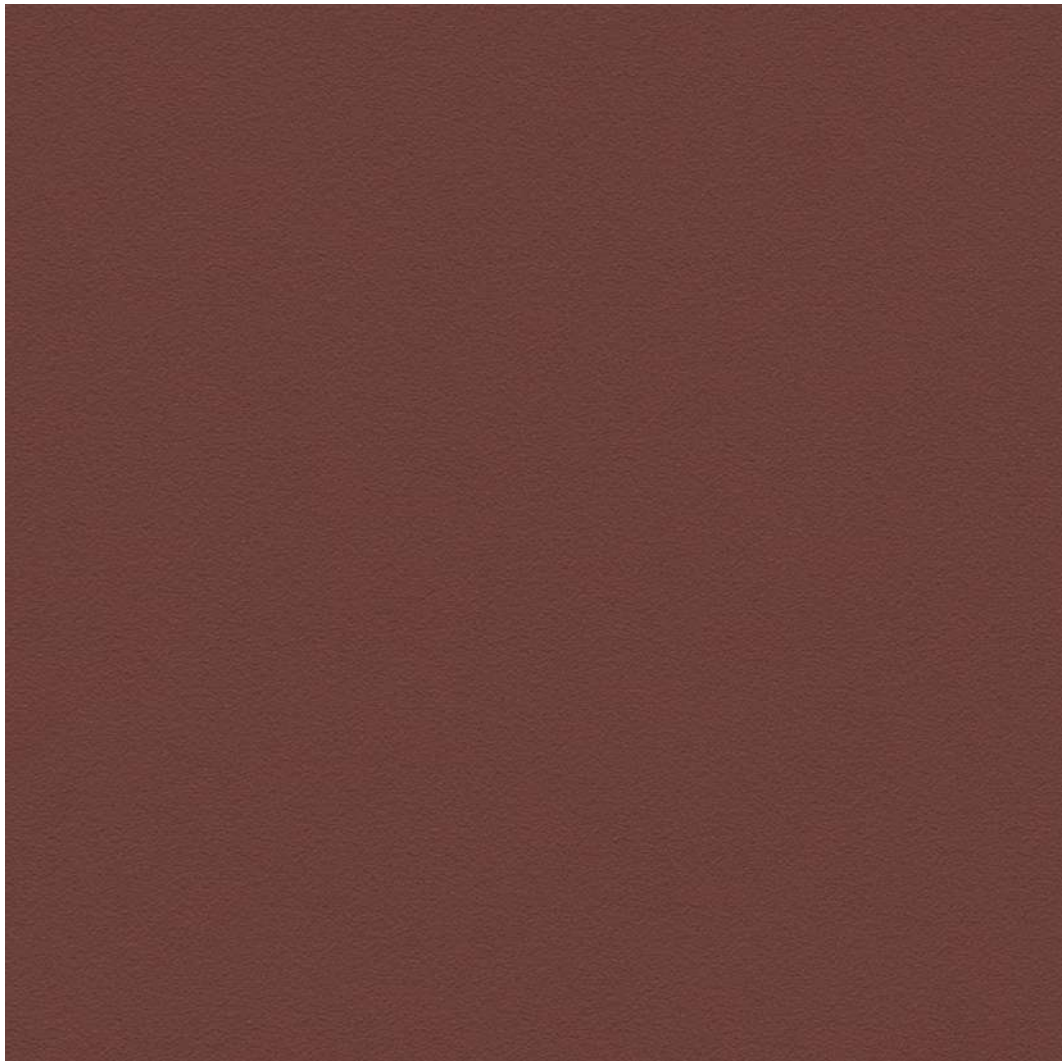

Quarry tile

Spanish Red Smooth

8"X 8"

SKU: 225000381

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	7/16 inches	




Wall/Floor



Commercial



Absorption



Quarry tile

Spanish Red Cove Base

6"X 6"

SKU: 225009180

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	




We care
for real life



Wall



Absorption





Quarry tile

Spanish Red Abrasive

6" x 6"

SKU: 225000386

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	




Wall/Floor



Commercial



Absorption



Quarry tile

Spanish Red Bullnose

6" x 6"

SKU: 225009572

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	




We care
for real life



Wall



Absorption





We care
for real life



Quarry tile

Spanish Red Outside Corner

1" x 6"

SKU: 225000347


Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption



Quarry tile

Spanish Red Inside Corner

1" x 6"

SKU: 225000344


Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption





Quarry tile

Spanish Dark Gray Cove Base 6"X 6"

SKU: 225027552

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption



Quarry tile

Spanish Dark Gray Smooth 8"X 8"

SKU: 225027645

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	7/16 inches	



Wall/Floor



Commercial



Absorption



We care
for real life



Quarry tile

Spanish Dark Inside Corner

1"x 6"

SKU: 225027554

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption



Quarry tile

Spanish Dark Outside Corner

1"x 6"

SKU: 225027553

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	




Wall



Absorption



We care
for real life

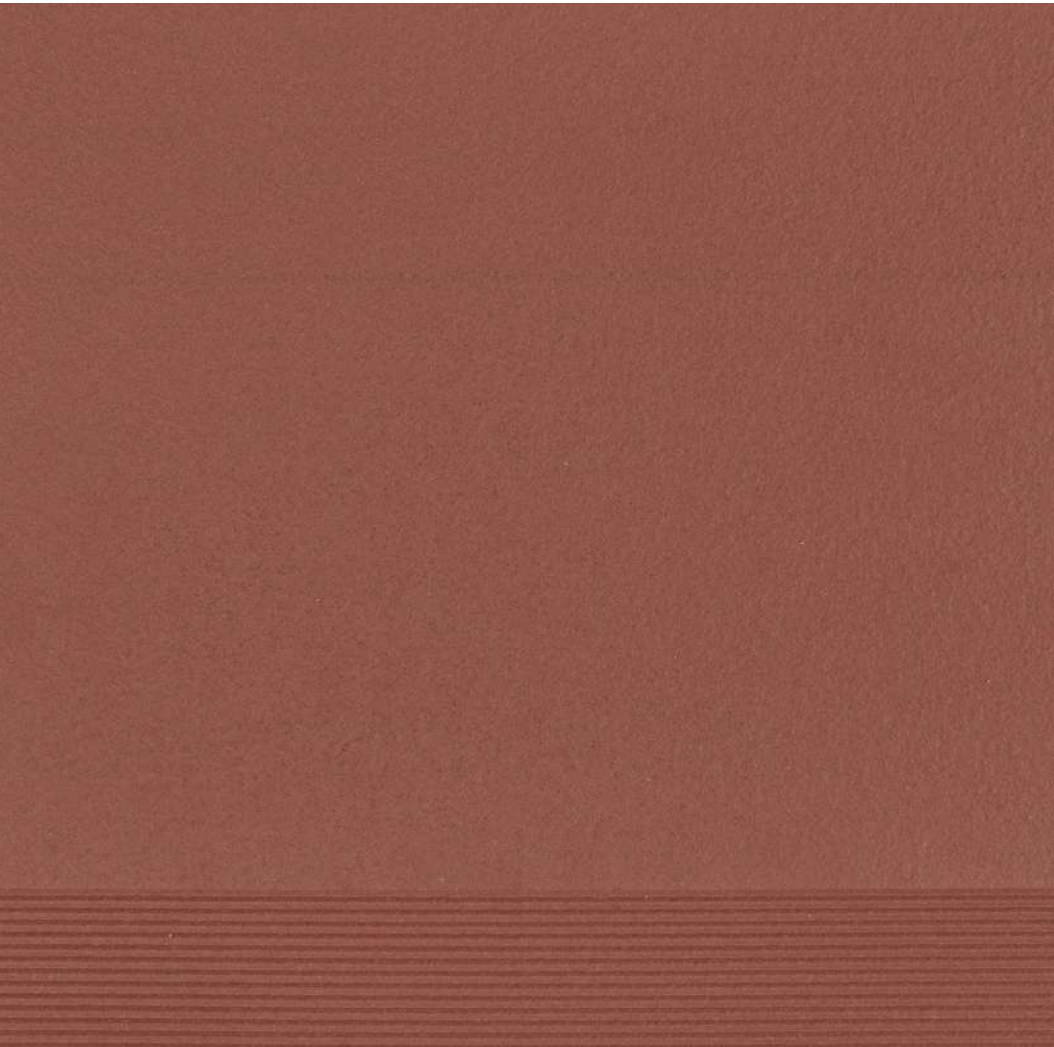

Quarry tile

Spanish Red Stair tread

Smooth

12"x 12"

SKU: 225000399

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	




Wall/Floor



Commercial



Absorption





Quarry tile

Etrusca Long Sahara

3"x 12"

SKU: 225026654



Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



We care
for real life




Wall/Floor



Commercial



Absorption



V2



Quarry tile

Etrusca Long

Spanish Red

3"x 12"

SKU: 225026655

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



We care
for real life




Wall/Floor



Commercial



Absorption



V2



Quarry tile

Etrusca long Salmon Sand

Smooth

3"x 12"

SKU: 225026656

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	




Wall/Floor




Commercial



Absorption



V2

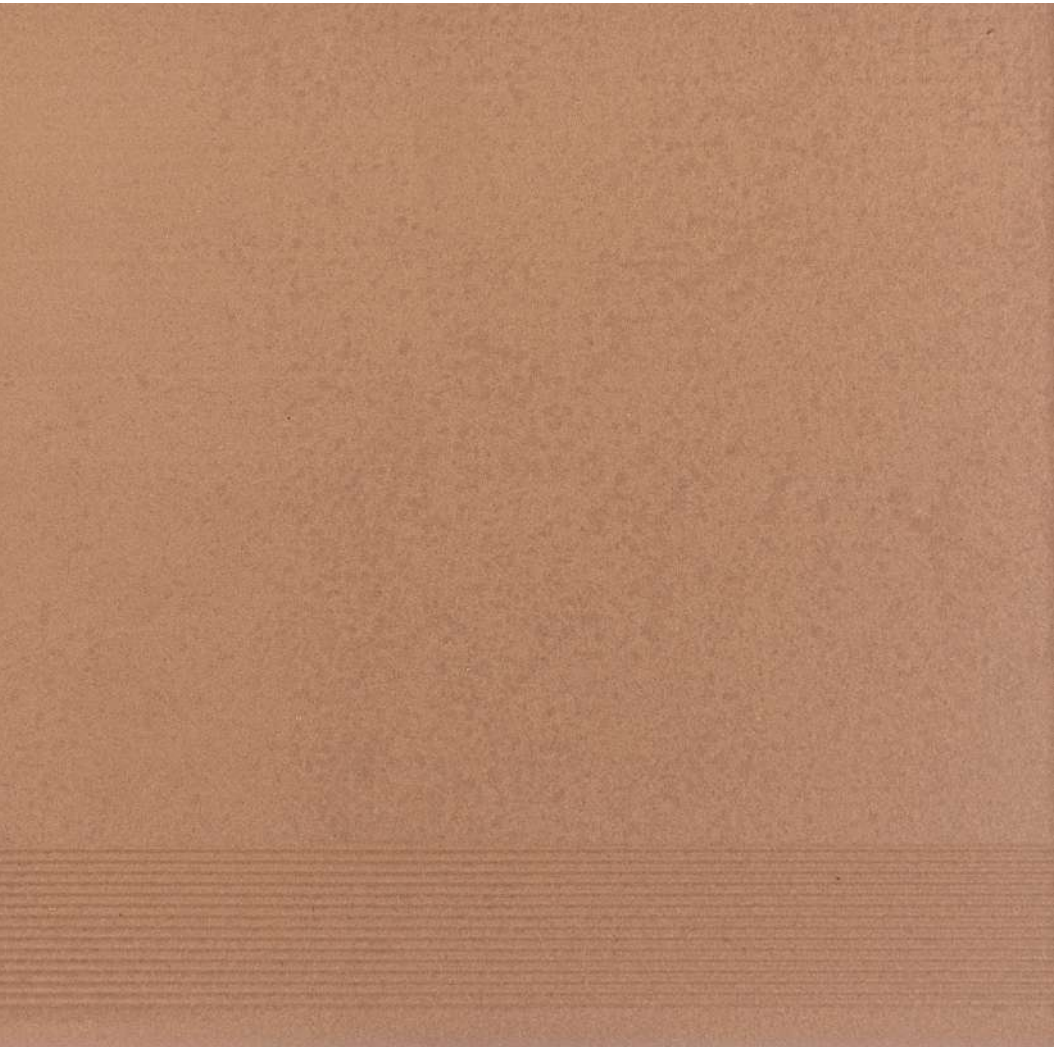

Quarry tile

Sahara Stair tread

Smooth

12"x 12"

SKU: 225000400

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



We care
for real life



Wall/Floor



Commercial



Absorption





Quarry tile

Industrial Quarry Sahara Smooth

5" x 10"

SKU: 225000419

Water Absorption	ASTM C373	< 5%
Breaking Streght (N)	1300	
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/4 inches	



We care
for real life




Wall/Floor



Commercial



Absorption





Quarry tile

Industrial Quarry

Sahara

Smooth

5" x 10"

SKU: 225005692



Water Absorption	ASTM C373	< 6 %
Breaking Streght (N)	1300	
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	1/2 inches	



We care
for real life




Wall/Floor



Commercial



Absorption



V2



Quarry tile

Sahara

Bullnose

6" x 6"

SKU: 225009571

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption



Quarry tile

Sahara

Abrasive

6" x 6"

SKU: 225000388

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	




Wall/Floor



Commercial



Absorption



We care
for real life



We care
for real life



Quarry tile

Sahara

Outside Corner

1"x 6"

SKU: 225000348

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption



Quarry tile

Sahara

Inside Corner

1"x 6"

SKU: 225000345


Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption





Quarry tile

Sahara

Cove Base

6"X 6"

SKU: 225009181

Water Absorption	ASTM C373	< 6 %
Resistance to Freeze	Not affected	
Thickness	3/8 inches	



Wall



Absorption



We care
for real life



Quarry tile

Porcelagres Terracota

12"x 12"

SKU: 225027632

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



Wall/Floor




High



Absorption



Satin



>C6



Quarry tile

Porcelagres

Saltillo Rosso

12"x 12"

SKU: 225027650

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



We care
for real life



Wall/Floor



High



Absorption



Satin



>C6



Quarry tile

Porcelagres Saltillo Rosso

3"x 12"

SKU: 225027653



Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	3/8 inches	



We care
for real life



Wall/Floor



High




Absorption



Satin



>C6

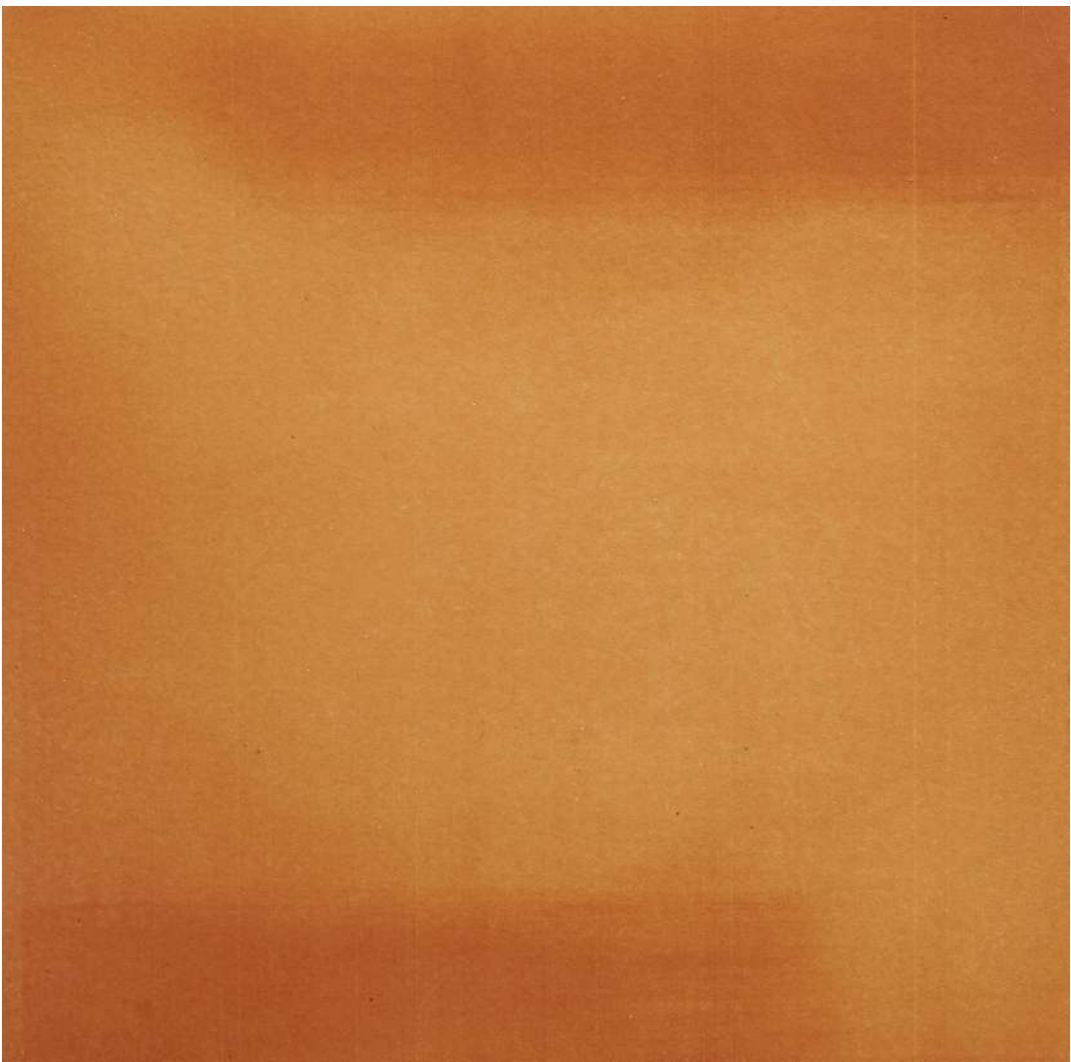

Quarry tile

Porcelagres Saltillo

12" x 12"

SKU: 225028852

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



Wall/Floor





High



Absorption



Satin



>C6



Quarry tile

Porcelagres Indigo

12"x 12"

SKU: 225027658

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



Wall/Floor




High



Absorption



Satin



>C6



Quarry tile

Porcelagres

Indigo

6"x 12"

SKU: 225027657

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



Wall/Floor





High



Absorption



Satin



>C6



Quarry tile

Porcelagres Indigo

3"x 12"

SKU: 225027665

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	3/8 inches	



We care
for real life



Wall/Floor




High



Absorption



Satin



>C6



Quarry tile

Porcelagres Damasco

12\"/>

SKU: 225027660

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	< 0,42	
Thickness	7/16 inches	



Wall/Floor




High



Absorption



Satin



>C6



Quarry tile

Porcelagres

Damasco

6"x 12"

SKU: 225027659

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	7/16 inches	



Wall/Floor




High



Absorption



Satin



>C6



Quarry tile

Porcelagres

Grip Taupe

12"x 12"

SKU: 225026424

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	



We care
for real life



Wall/Floor



High




Absorption



Mate



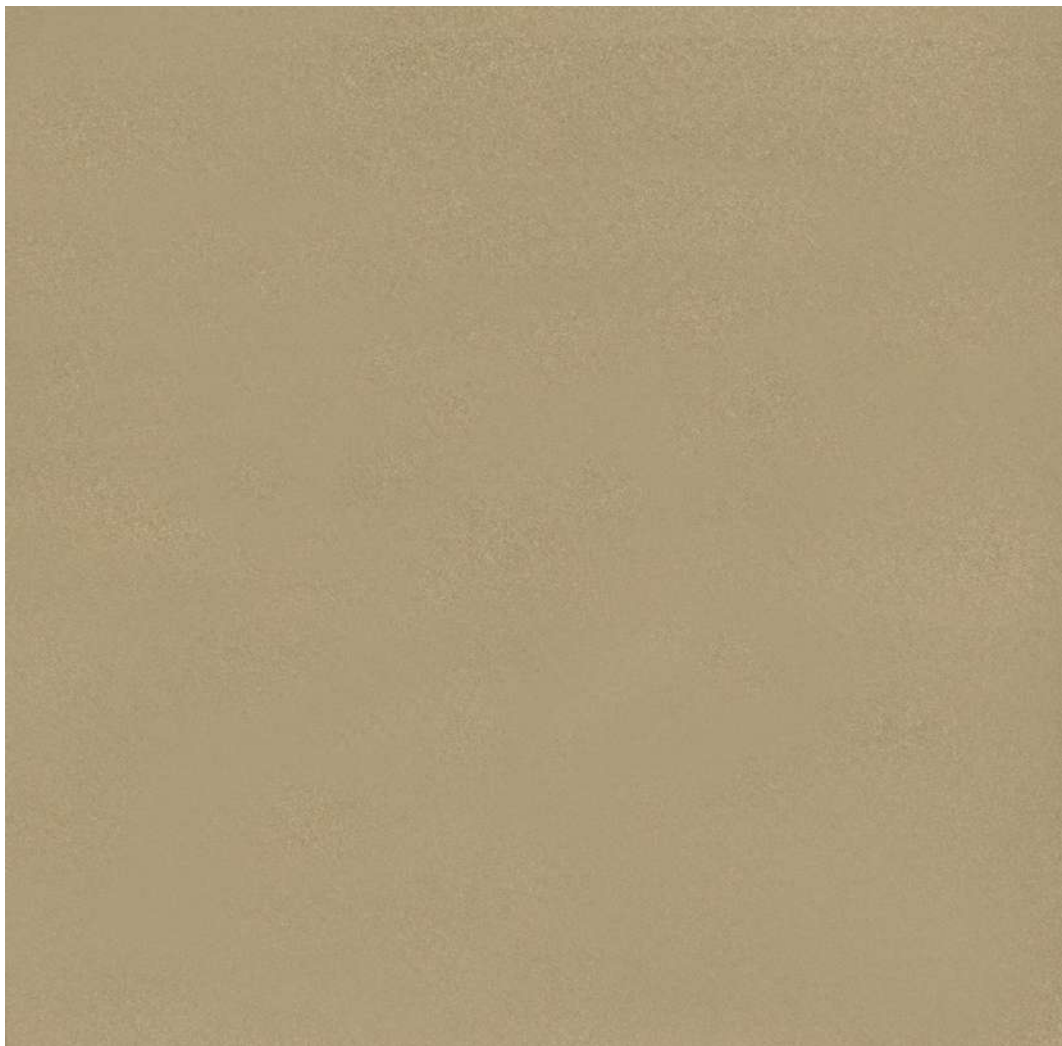

Quarry tile

Porcelagres

Grip Bone

12"x 12"

SKU: 225026423

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	



We care
for real life



Wall/Floor



High




Absorption



Mate



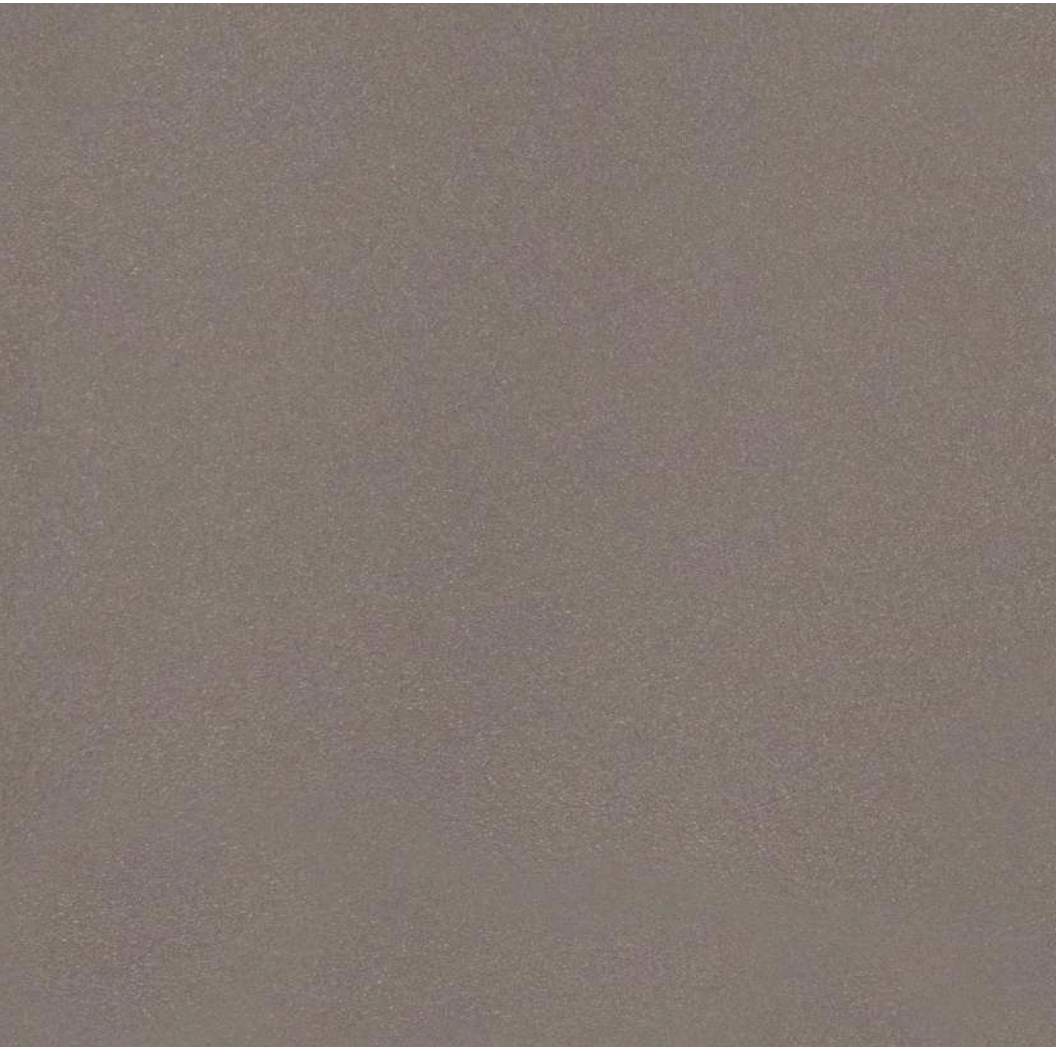

Quarry tile

Porcelagres

Grip Gray

12"x 12"

SKU: 225026425

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	



We care
for real life



Wall/Floor



High



Absorption



Mate





Quarry tile

Porcelagres

Baltic Gray

6" x 6"

SKU: 225028268

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/18 inches	



Wall/Floor



High



Absorption



Mate





Quarry tile

Porcelagres Terracota

6" x 12"

SKU: 225027633

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	7/16 inches	



Wall/Floor



High



Absorption



Satin



>C6



Quarry tile

Porcelagres Terracota

3" x 12"

SKU: 225027634

Water Absorption	ASTM C373	< 6 %
Breaking Streght (LB)	ASTM C648	C 219 lbf
Resistance to Freeze	Not affected	
Dynamic C.O.F	> 0,42	
Thickness	3/8 inches	



We care
for real life



Wall/Floor



High



Absorption



Satin



>C6